


Aluminium wire conductor

Cat. no.
80000809

Type
DR8

Material
(Al) aluminium

To be used as down or horizontal conductor.
Coating thickness comply with EN 62561-2:2012 norm (zinc plated minimum 350g/m², copper bonded minimum 70 µm).
Available packing: 20 kg coils (aluminium wire), 50 kg coils (galvanised & stainless steel wires). Cut- to- length sales also available. A tolerance of +/- 5% applies.

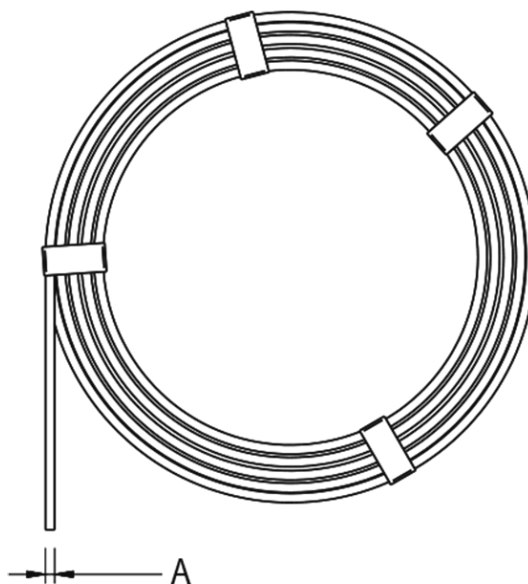

TYP	A	WEIGHT [kg/m]
DR8	8	0,136